SIEMENS

Manual

SENTRON

3VA Molded Case Circuit Breakers with UL and IEC Certification

Edition 01/2019

siemens.com/3VA

Contents

Welcome to CoPilot Truck | Mobile! **1**
Safety Warning **2**
Getting Started **3**
Requirements 3
Hardware Setup 4
Connecting Your Smartphone 6
Installing CoPilot **7**
Software Activation 8
Deactivation and License Upgrade 8
Adding a Data Region 9
Region Selection 10
Changing the Voice Option At Any Time 10
Map Download To Your Smartphone **11**
Data Selection Options 13
Data Download Options 19
CoPilot Quick Start Application Download 20
POI Download Options 21
Trip Transfer 22
Importing Custom Places 23
Using CoPilot for Guidance **27**
Address Entry 28
Stop Menu Options 31
Entering a Home Address 34
Entering a Work Address 34
Favorites 35
Intersection 36
Contact Integration 36
Finding Points of Interest 37
Picking Stops from the Map 40
Start Driving! 41
Safety View 41
Map Views 42
Itinerary View 43
Trip Editing 44
Taking a Detour 45
Selective Routing: Avoiding Roads 46
Selective Routing: What Are Waypoints? 46
Getting ETA's and Distances 47
Saving a Current Location 48
Optimizing Your Stop Order 48
Options 49
GPS Options 49
Routing Options 51
Guidance Options 54
Map Options 54
Live Options 55
Upgrade License 55
Traffic Options 55
POI Alerts 56
CoPilot Modes 58
Trip Planning On Your Smartphone **59**
Trip Planning On Your Desktop PC **61**
Reference: CoPilot on Your Desktop 70
CoPilot Live Communications **75**
Real-Time Traffic Information **78**
CoPilot Technical Support **81**
Using Help Files **82**
Software Registration **82**

Downloaded from www.Manualslib.com manuals search engine

Table of Contents

Preface

1 Introduction

1.1 The Architecture 1–1
1.1.1 Addressing 1–2
1.1.2 Integer Data Types 1–2
1.1.3 Floating-Point Data Types 1–2
1.2 21264/EV68A Microprocessor Features 1–3

2 Internal Architecture

2.1 21264/EV68A Microarchitecture 2–1
2.1.1 Instruction Fetch, Issue, and Retire Unit 2–2
2.1.1.1 Virtual Program Counter Logic 2–2
2.1.1.2 Branch Predictor 2–3
2.1.1.3 Instruction-Stream Translation Buffer 2–5
2.1.1.4 Instruction Fetch Logic 2–6
2.1.1.5 Register Rename Maps 2–6
2.1.1.6 Integer Issue Queue 2–6
2.1.1.7 Floating-Point Issue Queue 2–7
2.1.1.8 Exception and Interrupt Logic 2–8
2.1.1.9 Retire Logic 2–8
2.1.2 Integer Execution Unit 2–8
2.1.3 Floating-Point Execution Unit 2–10
2.1.4 External Cache and System Interface Unit 2–11
2.1.4.1 Victim Address File and Victim Data File 2–11
2.1.4.2 I/O Write Buffer 2–11
2.1.4.3 Probe Queue 2–11
2.1.4.4 Duplicate Dcache Tag Array 2–11
2.1.5 Onchip Caches 2–11
2.1.5.1 Instruction Cache 2–11
2.1.5.2 Data Cache 2–12
2.1.6 Memory Reference Unit 2–12
2.1.6.1 Load Queue 2–13
2.1.6.2 Store Queue 2–13
2.1.6.3 Miss Address File 2–13
2.1.6.4 Dstream Translation Buffer 2–13
2.1.7 SROM Interface 2–13
2.2 Pipeline Organization 2–13
2.2.1 Pipeline Aborts 2–16
2.3 Instruction Issue Rules 2–16

Downloaded from www.Manualslib.com manuals search engine

Downloaded from www.Manualslib.com manuals search engine

- The water in your dishwasher should not be used for drinking. Detergent residues may still be present in your machine. Make sure you do not splash these caustic residues onto your skin or suffocate yourself! Keep children well away from your dishwasher when its door is open.

Your dishwasher in day-to-day use

- Never operate your dishwasher if the electrical supply lead, supply or drainhose, control panel, worktop or plinth are damaged.
- If there is a fault, first turn the water tap off. Then switch off your machine and pull the plug out of the socket. If there is a fixed connection, switch off or unscrew the fuse(s).
- Never pull the plug out of the socket by the cable - always hold the plug.
- Dishwasher repairs should only be performed by trained personnel. Improper repairs may seriously endanger the user. If your dishwasher needs to be repaired, you should contact our service centre or your retailer.
- Never place any solvents in your dishwasher or you may cause an explosion!
- Do not rest or sit on the open door or the machine could tilt.
- Before using special dishwasher salt, detergent or rinse-aid, make sure that the manufacturer of these products expressly specifies their use in domestic dishwashers.
- Always turn off the water tap when your dishwasher is left unattended for any length of time, e.g. when you are away on holiday.
- Only transport the dishwasher in an upright position. Tipping it upside down during transport could cause salty water to leak into the internal compartment and lead to the formation of rust.

Downloaded from www.Manualslib.com manuals search engine

Quick installation

The first time you switch on the television, a menu appears on the screen and the tuning starts automatically.

If the menu is not displayed, press and hold down the ◢- and ◢+ keys on the TV set for 5 seconds to start the tuning.

All the available TV programs and radio stations * will be stored. This operation takes a few minutes. The display shows the progress of the search and the number of programs found.

At the end of the search, the menu disappears.

To exit or interrupt the search, press (MENU).

If no program is found, consult the possible solutions p. 12.

❶ If the transmitter or cable network sends the automatic sort signal, the programs will be numbered correctly. In this case, the installation is complete.

❷ If this is not the case, you need to use the **Sort** menu to number the programs correctly.

Some transmitters or cable networks broadcast their own sort parameters (region, language, etc.). In this case, indicate your choice using the (^)(v) *keys and validate with* (>).

* *Only on versions equipped with a radio.*

Program sort

❶ Press key (MENU). The **Main menu** is displayed on the screen.

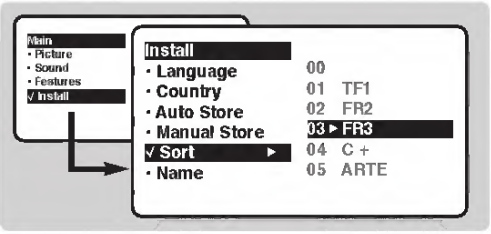

❷ With the cursor, select the **Install** menu followed by the **Sort** menu.

❸ Select the programme you want to move using the (^)(v) keys and press (>).

❹ Then use the (^)(v) keys to select the new number and validate with (<).

❺ Repeat steps ❸ and ❹ for each program you wish to renumber.

❻ To quit the menus, press (⊞).

Program name

If required, you can give a name to the programmes and external connectors.

Note: on installation, the programs are named automatically when an identification signal is sent.

❶ Press the (MENU) key.

❷ With the cursor, select the **Install** menu, then **Name**

❸ Use the (^)(v) keys to select the programme to name or rename.

❹ Use the (<)(>) keys to move around the name display area (5 characters) and the (^)(v) keys to select the characters.

❺ When the name has been entered, use the (<) key to exit. The name is stored.

❻ Repeat steps ❸ to ❺ for each programme you wish to name.

❼ To quit the menus, press (⊞).

Downloaded from www.Manualslib.com manuals search engine

2.3 Verify Connection to Router

Step 1 Go to **Start**, **Run**, type **command** (for Windows 95/98/ME) or **cmd** (for Windows 2000/XP) and click **OK**. You will see the command prompt as below.

Step 2 Type **ping 192.168.1.1** and press **Enter**. You should get four reply responses back.

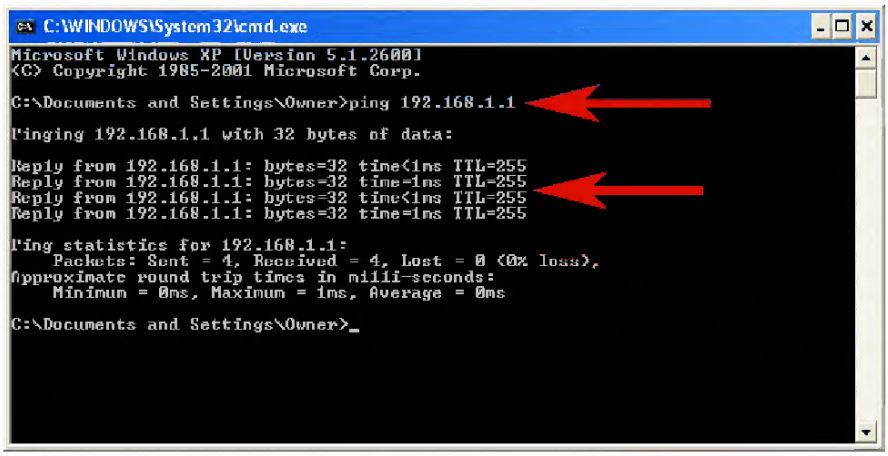
C:\WINDOWS\System32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\Owner>ping 192.168.1.1
Pinging 192.168.1.1 with 32 bytes of data:
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time=1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time=1ms TTL=255
Ping statistics for 192.168.1.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\Documents and Settings\Owner>_

Step 3 If you get **Request timed out**, or **Destination host unreachable**, double-check the network cable connection between the computer and the router and try **Step 2** again. If you still encounter problem, go to the next step; otherwise proceed to **Section 3, Configure the Router**.

Step 4 For Windows 2000/XP, type **ipconfig/release** and press **Enter**.

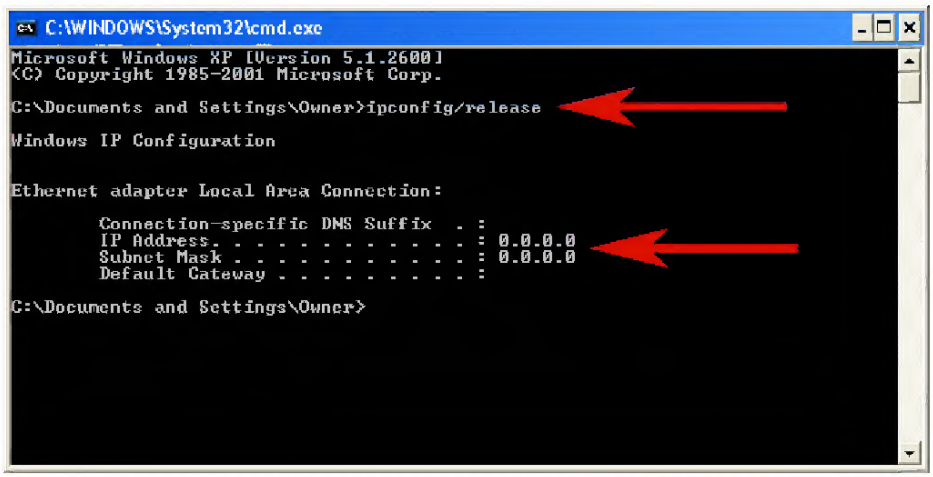
C:\WINDOWS\System32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\Owner>ipconfig/release
Windows IP Configuration
Ethernet adapter Local Area Connection:
Connection-specific DNS Suffix . :
IP Address. . . . . : 0.0.0.0
Subnet Mask . . . . . : 0.0.0.0
Default Gateway . . . . . :
C:\Documents and Settings\Owner>

Downloaded from www.Manualslib.com manuals search engine

CONNECTION

POWER ON:

ON/OFF/PLAY/PAUSE/STOP



NOTE: When the player is turned on it will be in the MUSIC mode.

Press " ▶|| " to turn on the player.

POWER OFF:

ON/OFF/PLAY/PAUSE/STOP



Press " ▶|| " and hold to turn off the player.

Downloaded from www.Manualslib.com manuals search engine

Table of Contents

Section 1 System Description 11
This section of ADTRAN's TRACER 4106/4206 System Manual is designed for use by network engineers, planners, and designers for overview information about the TRACER 4106/4206.

Section 2 Microwave Path Engineering Basics 13
Explains the basics of analyzing a wireless microwave link or path. The significant parameters are defined, and several recommendations are offered.

Section 3 Engineering Guidelines 25
Provides information to assist network designers with incorporating the TRACER 4106/4206 system into their networks.

Section 4 Network Turnup Procedure 35
Provides shipment contents list, grounding instructions, mounting options, and specifics of supplying power to the unit.

Section 5 User Interface Guide 41
Provides detailed descriptions of all menu options and configuration parameters available for the TRACER 4106/4206.

Section 6 Troubleshooting Guide 55
Provides helpful information for troubleshooting common configuration problems for the TRACER 4106/4206.

© 2004 ADTRAN, Inc.

Downloaded from www.Manualslib.com manuals search engine

For Alera wireless hearing instruments follow the following steps to enter and leave flight mode:
It is possible to disable wireless operation by opening and closing the battery compartment of the hearing instrument while at the same time pressing the push button.
When disabled manually, wireless operation may be re-enabled by opening and closing the battery compartment normally, (i.e. without at the same time pressing the push button).

For Verso and Up wireless hearing instruments follow the following instructions to enter and leave flight mode:
It is possible to disable wireless operation by opening and closing the battery compartment three times within a ten second period (open-close, open-close, open-close). Your instruments will now be in flight mode.

If the hearing instrument is in flight mode, the hearing instrument must have been operating in flight mode for at least 10 seconds before attempting to enable wireless again. It is possible to re-enable wireless operation by opening and closing the battery door once. 10 seconds after this operation is completed, wireless operation will begin again.

Note: It is important to wait an additional 15 seconds after wireless function resumes before opening and closing the battery compartment again for any reason. If the battery compartment is opened and closed during this 15 second window, flight mode will resume.

Telephone use

Finding the optimal position for holding a telephone may require practice for some individuals, and one or more of the following suggestions may be helpful.

1. Hold the telephone as you would normally.
2. Hold the telephone towards the top of the ear (closer to where the microphones are).
3. If whistling occurs, it may take a few seconds of holding the telephone in the same position before the hearing instrument eliminates the feedback.
4. Any whistling may also be decreased by holding the telephone slightly away from the ear.
5. Depending on your individual needs, your hearing care professional may activate a programme specifically for telephone use.

Lieten to radio or TV

When listening to the TV or the radio, start out by listening to news commentators since they usually speak clearly, then try other programmes. If you find it difficult to listen to TV or radio, your hearing care professional will be able to give you advice on available accessories to enhance your listening capabilities for TV and radio.

Cellular phones

Your hearing instrument is designed to comply with the most stringent Standards of International Electromagnetic Compatibility. However, not all cell phones are hearing instrument compatible. The varying degree of disturbance can be due to the nature of your particular cellular phone or of your wireless telephone service provider.

Downloaded from www.Manualslib.com manuals search engine

memory for the Oracle8 Server because it performs its own memory management for caching file and network I/O. See Figure 4.

Figure 4: Control Panel/Network/Services/Server - memory configuration

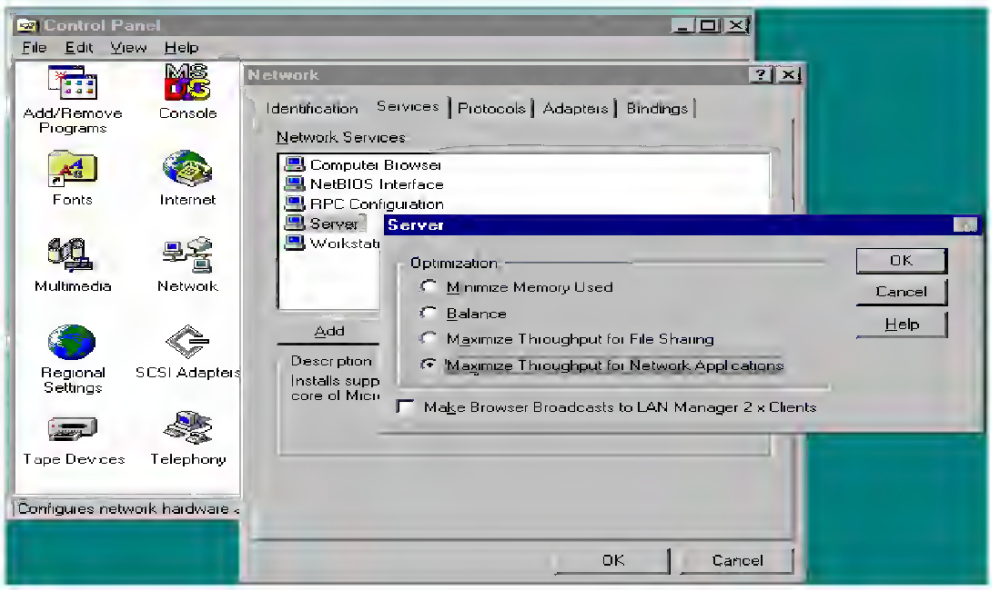

Network Protocols

Use Control Panel/Network to choose any protocol not required for the activities on the server from the Installed Network Software List and Remove. See Figure 5.

Figure 5: Control Panel/Network - network protocols

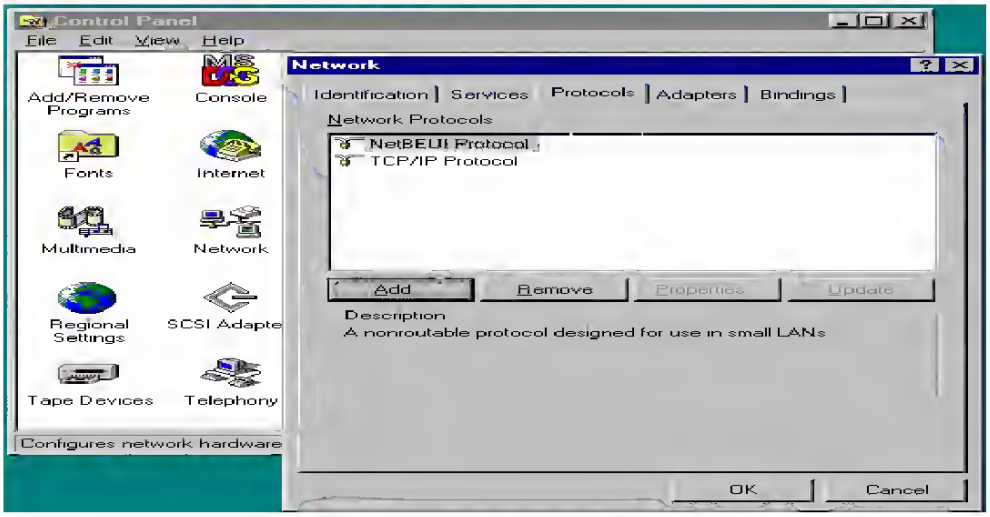

© 1998 Compaq Computer Corporation, All Rights Reserved

Downloaded from www.Manualslib.com manuals search engine

4 Use more of your TV

4.1 Main Menu

Menus help you to install channels, change picture and sound settings and access other TV features.

1 Press ⌂
» The menu screen appears

2 Select one of the following, then press OK
- **[Watch TV]**: If a source other than antenna is selected, switch back to the antenna source
- **[Browse USB]:** View photos and play music and movies contained in USB storage devices
- **[Device List]**: Access menus to change other source by pressing key
- **[Setup]**: Access menus to change picture, sound and other settings

4.2 Manually adjust picture setting





1 Press ⌂
2 Select **[Setup]** > **[Picture]** , then press OK
3 Select one of the following settings, then Press ▲▼ to move, and press ◄► to adjust
- **[Smart picture]**: Access predefined smart picture settings.
- **[Contrast]**: Adjust the intensity of backlight areas, while the video contents are kept unchanged.
- **[Brightness]**: Adjust the intensity and details of dark areas.
- **[Color]**: Adjust color saturation.
- **[Sharpness]**: Adjust sharpness in the image.
  Note: Not Applicable for VGA Mode
- **[Hue]**: Compensate for color variations. (Available only for NTSC channels)
- **[Color Temperature]**: Adjust the color balance in an image.
- **[Blueback]** :This function is used to ON/OFF the blue screen at no signal condition.

Downloaded from www.Manualslib.com manuals search engine

Rear Panel

The figure shows the system unit rear panel.

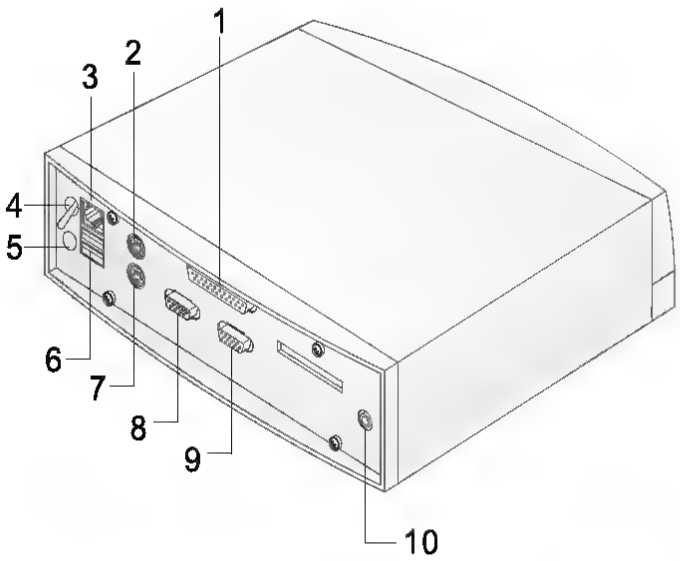

#	Description
1	Parallel/Printer connector
2	Mouse connector
3	Ethernet connector
4	Main power switch
5	Power adapter jack

Cómo añadir y eliminar canales

La función Editar canales le facilita AÑADIR o BORRAR canales de la lista de canales almacenada en la memoria del TV.

COMIENZO

1. Presione el botón MENU en el control remoto para mostrar el menú en pantalla.

2. Presione los botones del CURSOR HACIA ARRIBA ▲ o ABAJO ▼ para recorrer el menú en pantalla hasta que resalte la palabra INSTALAR.

3. Presione el botón del CURSOR A LA DERECHA ▶ para mostrar las funciones del menú INSTALAR.

4. Presione los botones del CURSOR HACIA ARRIBA ▲ o ABAJO ▼ para recorrer las funciones de INSTALAR hasta que resalten las palabras EDITAR CANAL.

5. Presione el botón del CURSOR A LA DERECHA ▶ para mostrar las opciones de EDITAR CANAL.

6. Teniendo en pantalla las opciones de EDITAR CANALES y estando resaltado CANAL NO., introduzca el número de canal (con los botones NUMERADOS o CH + o –) que desee añadir (Borrar NO) o borrar (Borrar SÍ) de la memoria del TV.

7. Desplácese hacia abajo (usando el botón CURSOR HACIA ABAJO ▼) para resaltar la palabra BORRADO.

8. Ahora use el botón CURSOR A LA DERECHA ▶ para alternar entre SÍ o NO.

   Si se selecciona SÍ, el canal se borra al recorrer los canales con los botones CH + o –. Si se selecciona NO, el canal no se borra al recorrer los canales con los botones CH + o –.

9. 9. Cuando haya terminado, presione el botón STATUS/EXIT para remover el menú de la pantalla del TV.

FIN

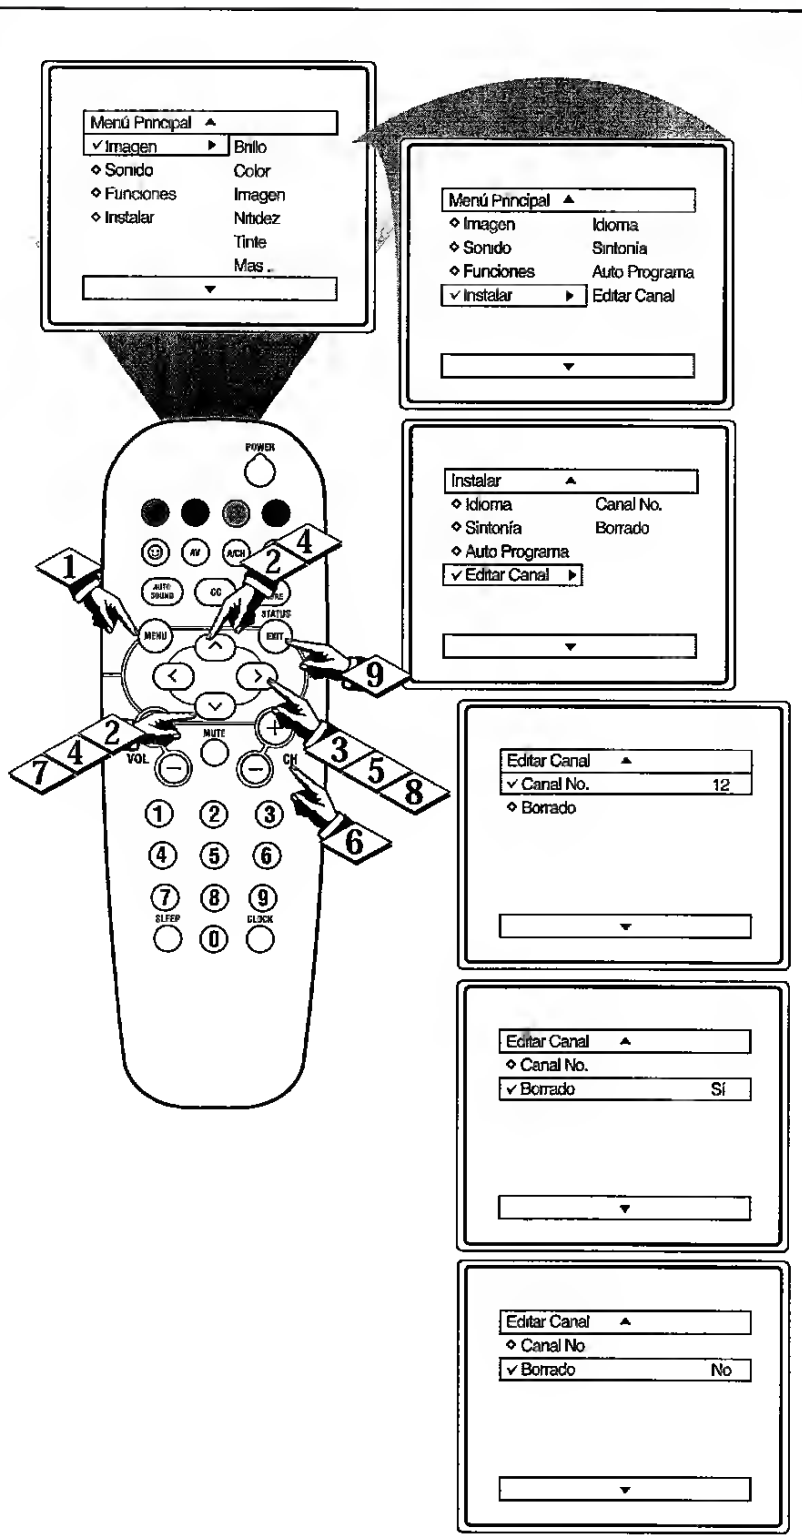

Downloaded from www.Manualslib.com manuals search engine

Loading cutlery

Warning: Sharp knives and other items of cutlery with sharp edges must be laid in the cutlery rack or in the upper basket to avoid the risk of injury.

To ensure that all items of cutlery in the cutlery basket can be reached by the water, you should:

1. Place the grid insert on the cutlery basket

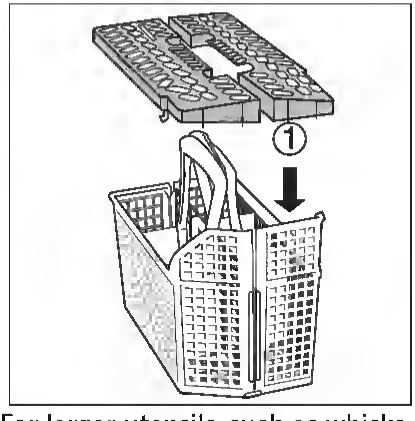

2. Place forks and spoons in the cutlery basket's grid insert with their handles pointing downwards.

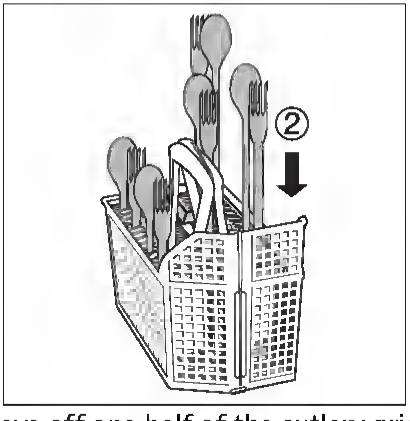

For larger utensils, such as whisks, leave off one half of the cutlery grid.

The cutlery basket can be opened out.

Always make sure that you put your hand around both parts of the two-part handle when removing it from the dishwasher.

1. Place the cutlery basket on a table or work surface.
2. Open out the two-part handle.
3. Remove cutlery.

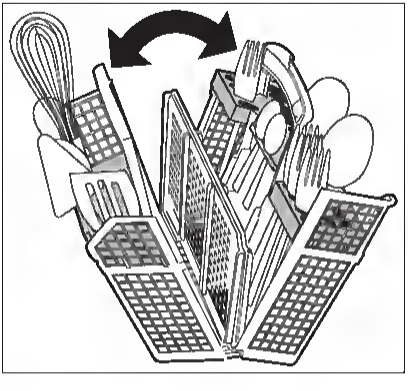

Monitor Block Diagram

The LCD MONITOR will contain an main board, an inverter/power board, keypad board and internal adapter which house the flat panel control logic, brightness control logic and DDC.
The Inverter board will drive the backlight of panel and the DC-DC conversion.
The Adapter will provides the 12V DC-power to inverter/power board

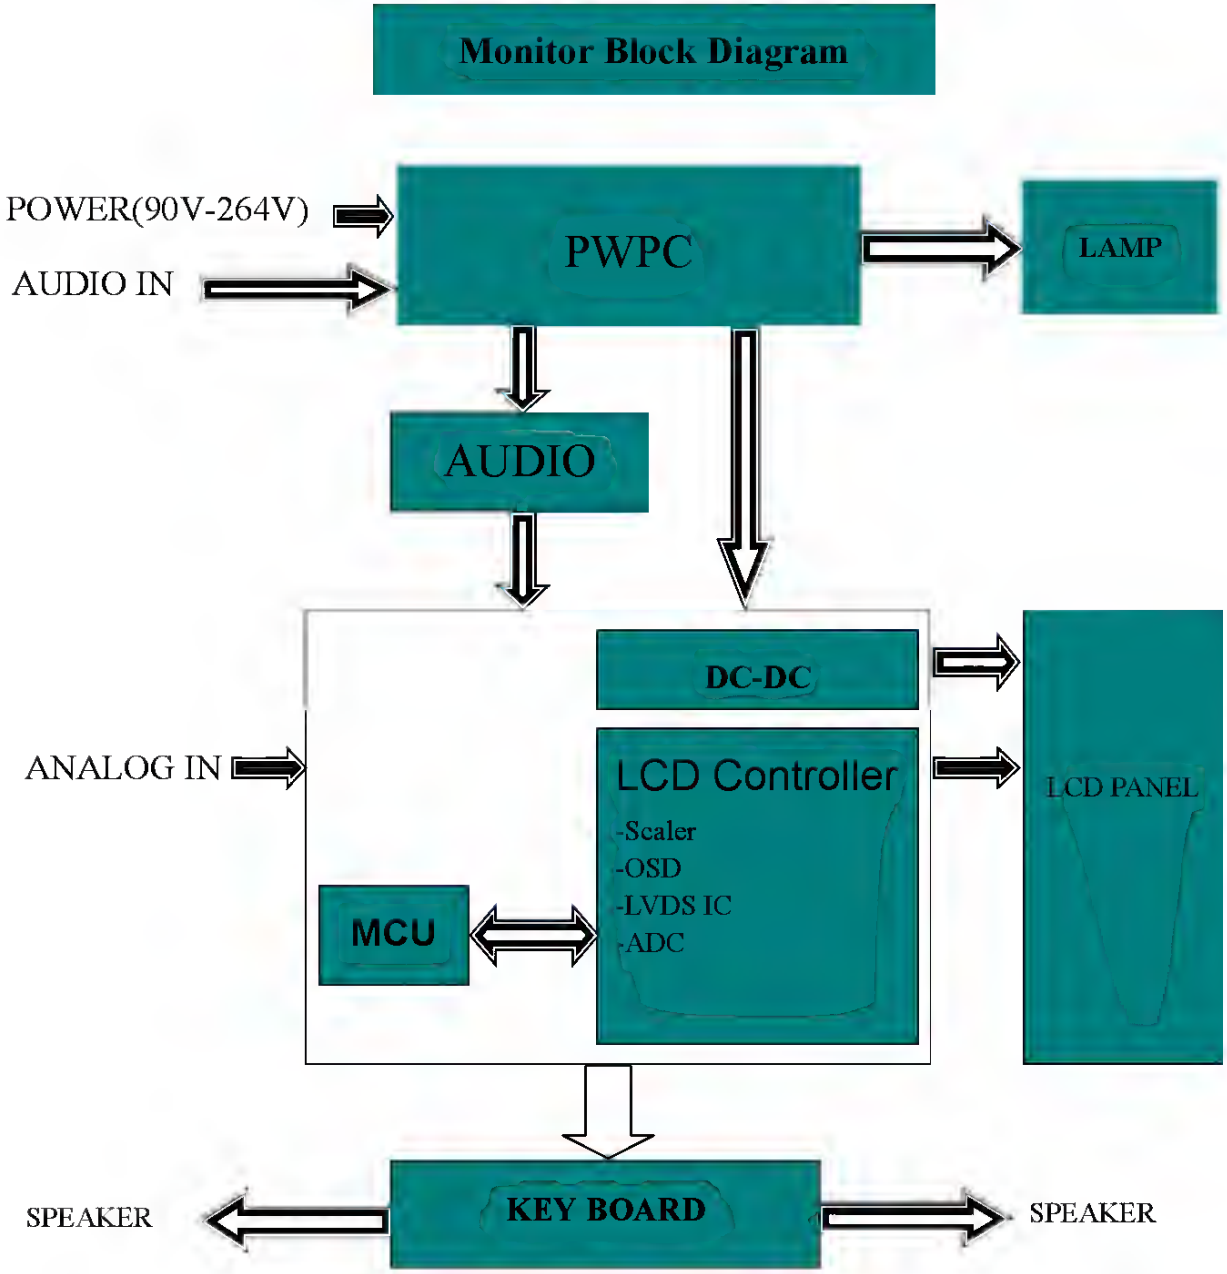

Downloaded from www.Manualslib.com manuals search engine

11. Lift motor and insert the TWO PINS on motor base into HOLES in cradle . . . push motor in as far as it will go.
12. Lower the blade . . .install belt on saw pulley and motor pulley.
13. Sight along edges of both pulleys and move motor pulley so that belt is parallel to the edges of both pulleys . . .tighten the setscrew in the motor pulley.
14. **IMPORTANT:** Measure the distance from end of motor shaft to pulley . . .mark this dimension down; you will need it later when reinstalling the pulley.
15. Make sure blade is 90° to table . . .raise it all the way up.
16. Lift motor until edge of washer is even with end of slot . . . tighten pivot screw. In this position, pull motor toward you (pins will slide out of cradle) until belt is TIGHT . . . tighten the two MOTOR BASE CLAMP SCREWS.
17. Loosen Pivot Screw slightly.
18. Lower the saw blade all the way down.
19. **IMPORTANT:** Motor should pivot freely downward as blade is lowered. If it does not, LOOSEN the PIVOT SCREW some more.
20. Pivot screw must be adjusted only tight enough to allow motor to pivot FREELY as blade is raised or lowered. This will maintain constant tension on belt.

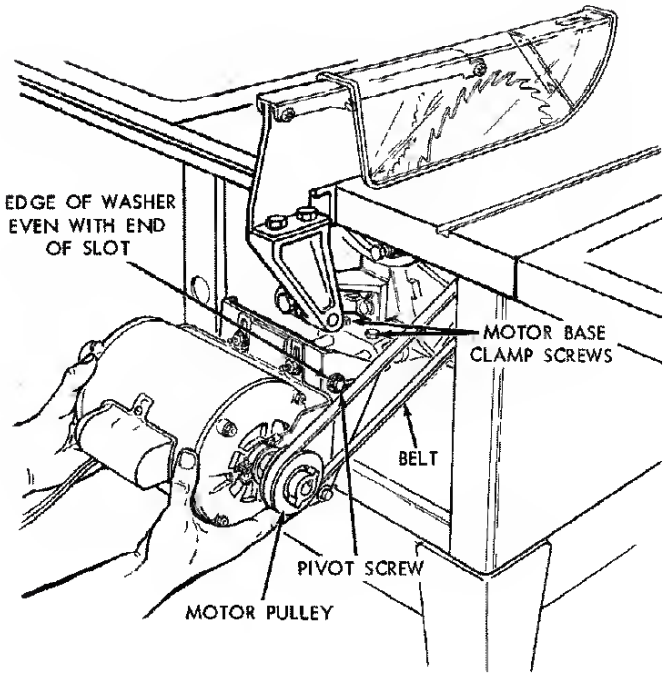

21. Loosen the two MOTOR CLAMP SCREWS on each end of motor. Rotate the motor so that the CAPACITOR COVER is on top . . .tighten the screws. The ventilation holes are now facing downward which will help prevent sawdust from entering motor.

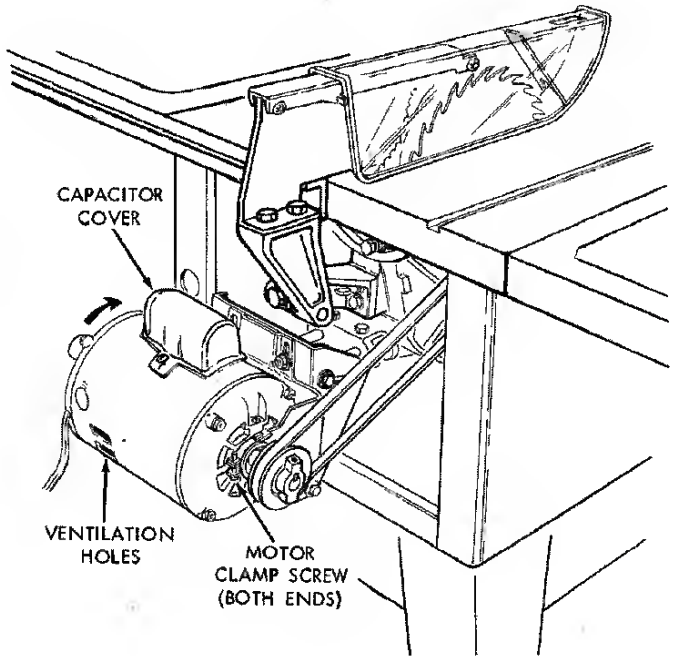

Downloaded from www.Manualslib.com manuals search engine

nat limit port range size 2-94
ip address dhcp client-id 2-94
end 2-95
pppoe auto-reconnect 2-95
pppoe mru 2-95
pppoe mtu 2-95
pppoe unnumbered 2-95
ip nat outside source static 2-96
ip address alternate 2-96

LAN IP interface context 2-97
end 2-97
ip address 2-97
ip address management 2-97
New tagged 2-97
New untagged 2-97

Public access RADIUS attributes context 2-98
end 2-98
active 2-98
credentials 2-98
interval 2-98
radius server profile 2-98

Virtual AP context 2-99
virtual ap name 2-99
access control 2-99
force centralize data 2-99
ingress interface 2-100
egress unauthenticated 2-100
guest-mode 2-100
max-association 2-100
ssid name 2-101
encryption key 1 2-101
encryption key format 2-101
transmit key 2-101
authentication server access controller 2-102
authentication server accounting 2-102
authentication server accounting radius profile 2-102
authentication server radius 2-102
dot1x authentication 2-102

Turning the projector off

1 To turn the projector off, press the power button. This message appears: **"Please press the power button again to complete the shutdown process."** Press the power button again.

2 The LED power indicator will turn RED and blink rapidly after the projector is turned off, and the fan(s) will continue to operate for about 2 minutes to ensure that the system cools properly. (only supported under "Instant Resume" mode)

3 As long as the power cord remains plugged in, you can press the power button to turn the projector immediately back on anytime during the 2-minute shutdown process. (only supported under "Instant Resume" mode)

4 Once the system has finished cooling, the LED power indicator will stop blinking and turn solid red to indicate standby mode.

5 It is now safe to unplug the power cord.

Warning indicators:

- **"Projector Overheated. Lamp will automatically turn off soon."**
  This onscreen message indicates that the projector has overheated. The lamp with automatically turn off, the projector will automatically shut down, and the LED temp indicator will turn solid red. Contact your local dealer or service center.
- **"Fan failed. Lamp will automatically turn off soon."**
  This onscreen message indicates that the fan has failed. The lamp will automatically turn off, the projector will automatically shut down, and the LED temp indicator will blink. Contact your local dealer or service center.

Note: Whenever the projector automatically shuts down and the LED lamp indicator turns solid red, contact your local reseller or service center.

Downloaded From projector-manual.com Acer Manuals

Downloaded from www.Manualslib.com manuals search engine

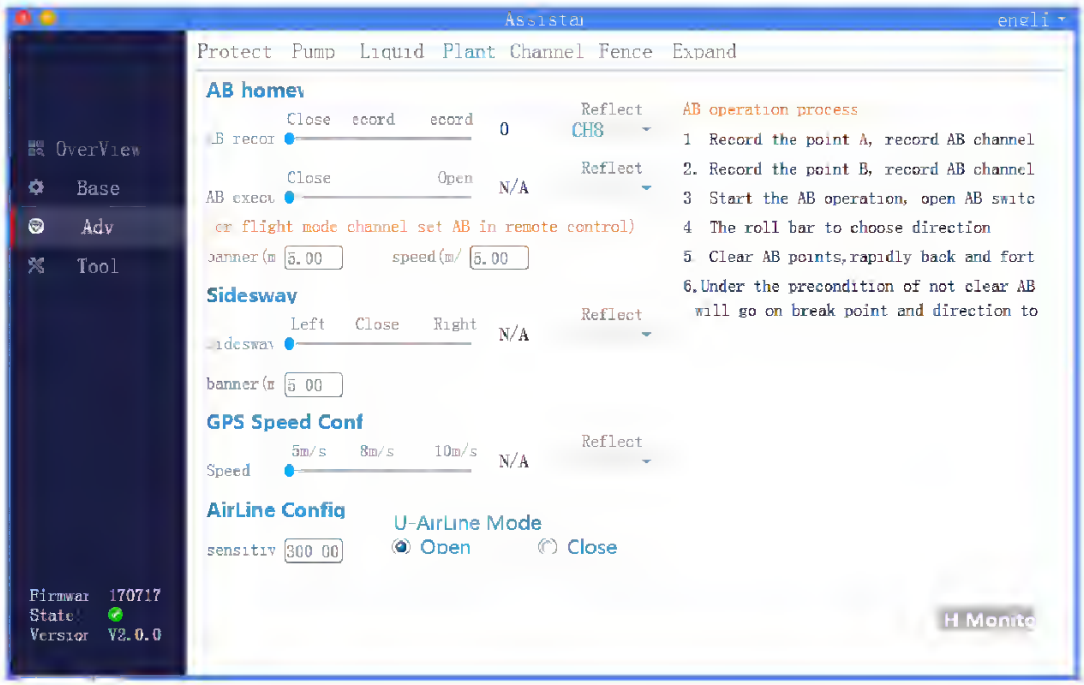

3、Operation： switch to " Close"–"Move to the left"–"Close", and it will execute a left side-move once; switch to " Close"—"Move to the right"–"Close", and it will execute a right side-move once.

5.2.3Pump control function

The function is to control flow of the pump.It supports two kinds of control modes: one is manual control mode which means output of pump is controlled by the remote controller directly. the other is linkage mode which means when the pump is switched on, the flow speed of the water pump is corresponding to the horizontal flight speed of the aircraft. In other words, the higher flight speed and the larger flow.

1、Connection : connect the ESC signal wire of the water pump to the PUMP port on the FCU.

2、Setting: connect to Assistant2 Software, configure the channel to control the water pump.

Supporting the configurations of the PUMP by both Assistant2 Software and APP.

Assistant Software setting:connect to Assistant2 Software and enter the path of "Adv"—"Pump".

APP setting: use data-link to connect the FCU. Please refer to the port definitions table.

(DVI Mode)

Problems	Current Status	Remedy
No Picture	LED ON	· Using OSD, adjust brightness and contrast to maximum or reset to their default settings.
	LED OFF	· Check the power switch.
		· Check if AC power cord is properly connected to the monitor.
	LED displays amber color	· Check if video signal cable is properly connected at the back of monitor.
		· Check if the power of computer system is ON.
Abnormal Sound (Only Audio-Input model) (Optional)	No sound, or sound level is too low	· Check the audio cable with the host PC is connected.
		· Check if the volume setup of the host PC is in minimum position and try to raise the volume level.

Downloaded from www.Manualslib.com manuals search engine

Widescreen display mode

Your Acer LCD TV has a special widescreen mode that allows you to toggle between Auto, 4:3, 16:9, Panorama, and Letterbox 1, 2 and 3 type views.

Press the **WIDE** key on the remote control to toggle the display between the four wide modes.

Wide mode

The Acer LCD contains four widescreen modes, including Auto, 4:3, 16:9, Panorama, and Letterbox 1, 2 and 3.

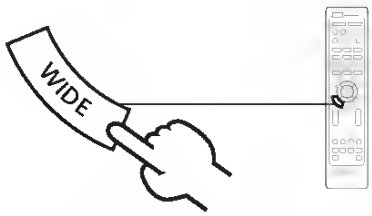

Auto	In this mode, TV will auto detect picture source and fit in suitable size.
4:3 	For 4:3 standard pictures. A side bar appears on each side.
16:9 	In this mode, the whole picture is stretched toward each side of the screen.
Panorama 	In this mode, the picture is progressively stretched toward each side of the screen.
Letterbox 1, 2, and 3 	In this mode, the picture is enlarged linearly to fit the screen. The top and bottom portions of the picture may be cut off.

Downloaded from www.Manualslib.com manuals search engine

User Controls

Using the On-Screen Display

1. The projector has a multi-language On-Screen Display (OSD) Menu that can be displayed with or without an input source.
2. Press the **Menu** button to enter the Main Menu.
3. To select an option, press the ▲ or ▼ button.
4. Use the ◀ or ▶ button to adjust the settings.
5. Press the **Enter** button to select highlighted menu items.
6. To exit the OSD, press the **Menu** button.

Main Menu (Type 1)

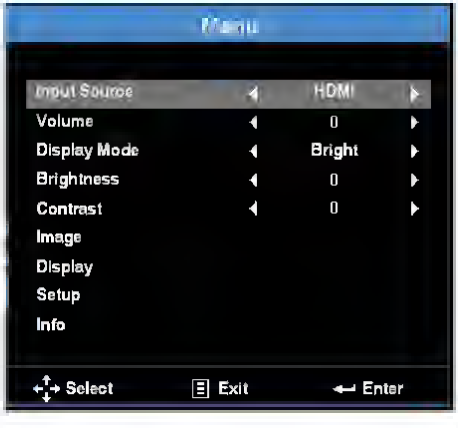

- **Input Source**: Select your projector's input source. The options are **VGA**, **HDMI**, **Media**, and **Video**.
- **Volume**: Adjust the volume.
- **Display Mode**: Optimize the display image. The options are **Bright**, **PC**, **sRGB**, **Cinema**, **Photo**, and **Eco**.
- **Brightness**: Adjust the display brightness.
- **Contrast**: Adjust the display contrast.

Connecting the Terminal Equipment

After successfully powering up the NT1 ACE, the POWER and ERROR indicators should be on and the READY indicator should be flashing. Make sure that terminal equipment (TE) is properly terminated as instructed in *Setting the Option Switches* on page 4. Plug the TE into one of the Local Bus connectors at the rear of the unit. A second TE may be plugged into the remaining Local Bus connector. If more than two TEs need to be connected to the NT1 ACE, additional connections can be made in parallel to the S/ T bus using RJ-45 connectors.

.TEs commonly have additional jacks wired in parallel. These may be used to connect more than two TEs as provided for by the NT1 ACE. See the TE documentation for further information.

After the TE powers up, the ERROR indicator should go out. There may be some delay between plugging in the TE and the ERROR indicator going out, depending on the specific TE in use. If the ERROR indicator fails to go out, see the section *Troubleshooting* on page 11.

As the ERROR indicator extinguishes, the READY indicator should illuminate. The TE will now be ready to place and receive calls. There may be a slight delay between the appearance of the READY indicator and the TE's ability to place and receive calls, depending on the specific TE in use. If the READY indicator fails to illuminate or if you are unable to place or receive calls, see the section *Troubleshooting* on page 11.

Downloaded from www.Manualslib.com manuals search engine

	Decrease	Increase
BRIGHTNESS	decreased brightness	increased brightness
PICTURE	decreased contrast	increased contrast
COLOR	paler	more brilliant
TINT	more purple	more green
SHARPNESS	softer	clearer

CCC130

Press the REW (ind)/◄ button to decrease a picture control. Press the F.FW D/► button to increase a picture control.

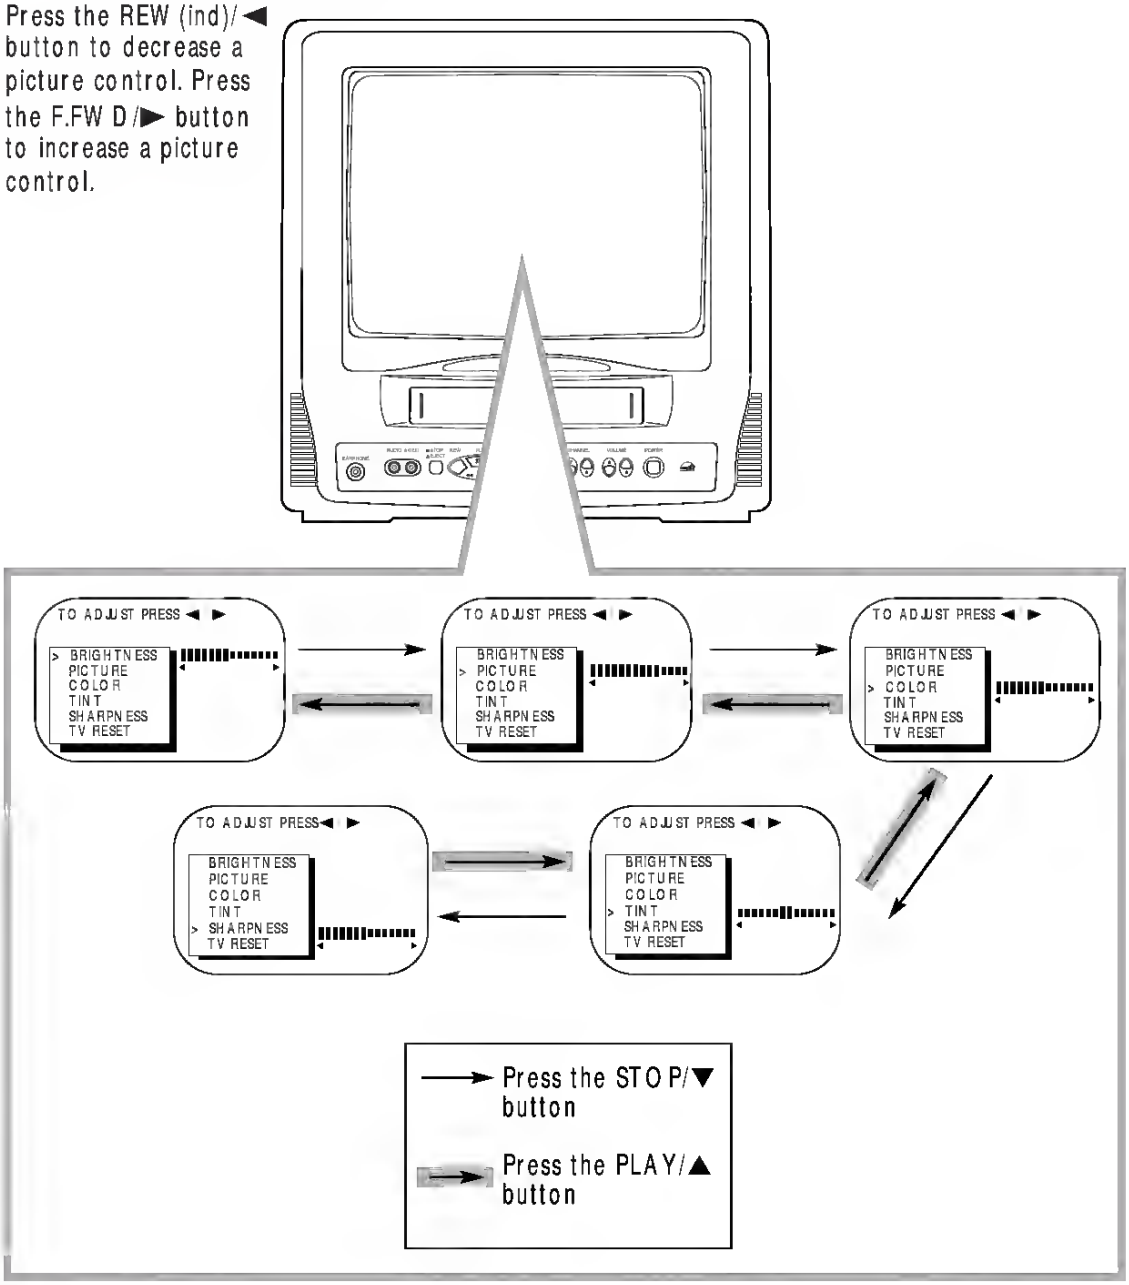

Downloaded from www.Manualslib.com manuals search engine

REPLACING AN OVEN LIGHT BULB

Disconnect the appliance from the electricity supply before replacing the bulb.

The type of bulb required is a 300°C, 25 watt small Edison Screw

1 Make sure the appliance is cool before you replace a bulb

2 Open the door and remove the shelves and wirework runners

3 Pull the glass bulb cover towards you and then pull it off. If necessary use a screwdriver to carefully lever off the cover, taking care not to damage the oven cavity

4 Unscrew the bulb by turning it to the left

5 Fit a new bulb and then replace the glass bulb cover.

6 Refit the wirework runners and replace the oven shelves.

7 Restore the electricity supply and reset the time of day



Downloaded from www.Manualslib.com manuals search engine

6. Screw off the screws and release the BTB connects on the MB.

Downloaded from www.Manualslib.com manuals search engine

The dishes are wet and dull.
- Rinse aid was not used.
- The rinse aid container is empty.

There are streaks, milky spots or a bluish coating on glasses and dishes.
- Lower rinse aid dosing.

There are dried water drops on the glasses and dishes.
- Increase rinse aid dosing.
- The detergent may be the cause. Contact the detergent manufacturer's customer advisor.

Technical Data

Capacity:	12 place settings including serving dishes
Permitted Water Pressure:	1-10 bar (=10-100 N/cm^2 = 0.1-1.0 MPa)
Electrical Connection:	Information on the electrical connection is given on the rating plate on the inner edge of the dishwasher door on the right.
Dishwasher: Free-Standing Appliances	
Dimensions:	850 x 600 x 600 (H x W x D in mm)
Max. Weight:	54 Kg
Dishwashers that Can Be Integrated, Built-In Dishwashers	
Dimensions:	820 – 880 x 596 x 570 (H x W x D in mm)
Max. Weight:	50 Kg
Dishwashers that Can Be Fully Integrated	
Dimensions:	820 – 880 x 596 x 546 - 550 (H x W x D in mm)
Max. Weight:	50 Kg

CE This appliance conforms with the following EU Directives:
- 73/23/EWG dated 19. 02. 1973 – Low Voltage Directive
- 89/336/EWG dated 03. 05. 1989
  (including Directive Amendment 92/31/EWG) – EMC Directive

Downloaded from www.Manualslib.com manuals search engine

Listen activated

Preferences - Multimedia tab

The Multimedia tab is used to select the multimedia device to be used for the speaker and microphone.

When the Microphone uLaw box is checked, microphone audio will be sent in uLaw format instead of PCM format. Audio sent in uLaw will be clearer and will have less noise than PCM audio. If your Multimedia card does not support uLaw, this option will be grayed out.

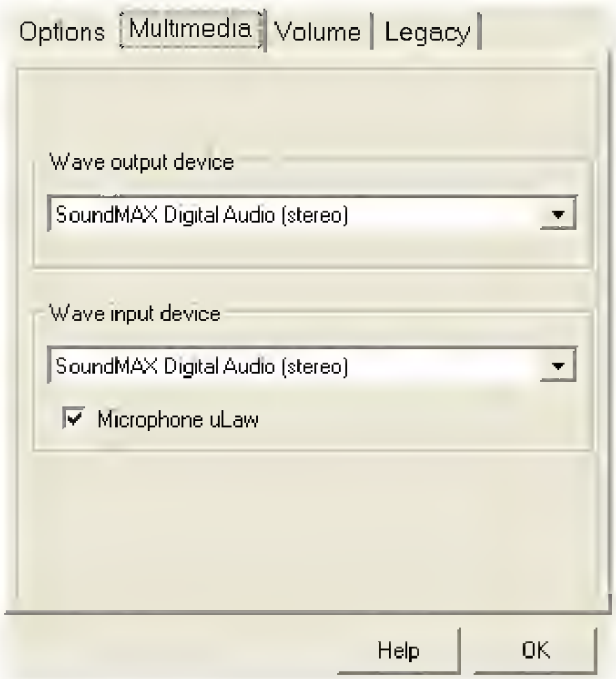

Preferences - Volume tab

The Volume tab is used to make adjustments to individual Intercoms.

Downloaded from www.Manualslib.com manuals search engine

SETTING THE AUTO PICTURE CONTROL

Whether you're watching a movie or a sporting event, your TV has automatic video control settings matched for your current program source or content. The Auto Picture feature quickly resets your TV's video controls for a number of different types of programs and viewing conditions you may have in your home. Each Auto Picture setting is preset at the factory to automatically adjust the TV's Brightness, Color, Picture, Sharpness, Tint, Color Temperature, DNR and Contrast+ levels.

BEGIN

1 **Press the AUTO PICTURE button** on the remote control. The current Auto Picture setting will appear in the middle of the screen.

2 **Press the AUTO PICTURE button repeatedly** to select either PERSONAL, MOVIES, SPORTS, WEAK SIGNAL, or MULTI MEDIA picture settings.

Note: The **PERSONAL** setting is the setting that you setup using the PICTURE options within the on-screen menu. This is the only Auto Picture setting that can be changed. All other settings are setup at the factory during the time of production.

MOVIES - Preset picture options for watching Video Tapes, or DVDs.

SPORTS - Preset picture options for watching sporting events.

WEAK SIGNAL - Preset picture options for watching programs where the reception is not at its best.

MULTI MEDIA - Preset picture options for use with video gaming.

STOP

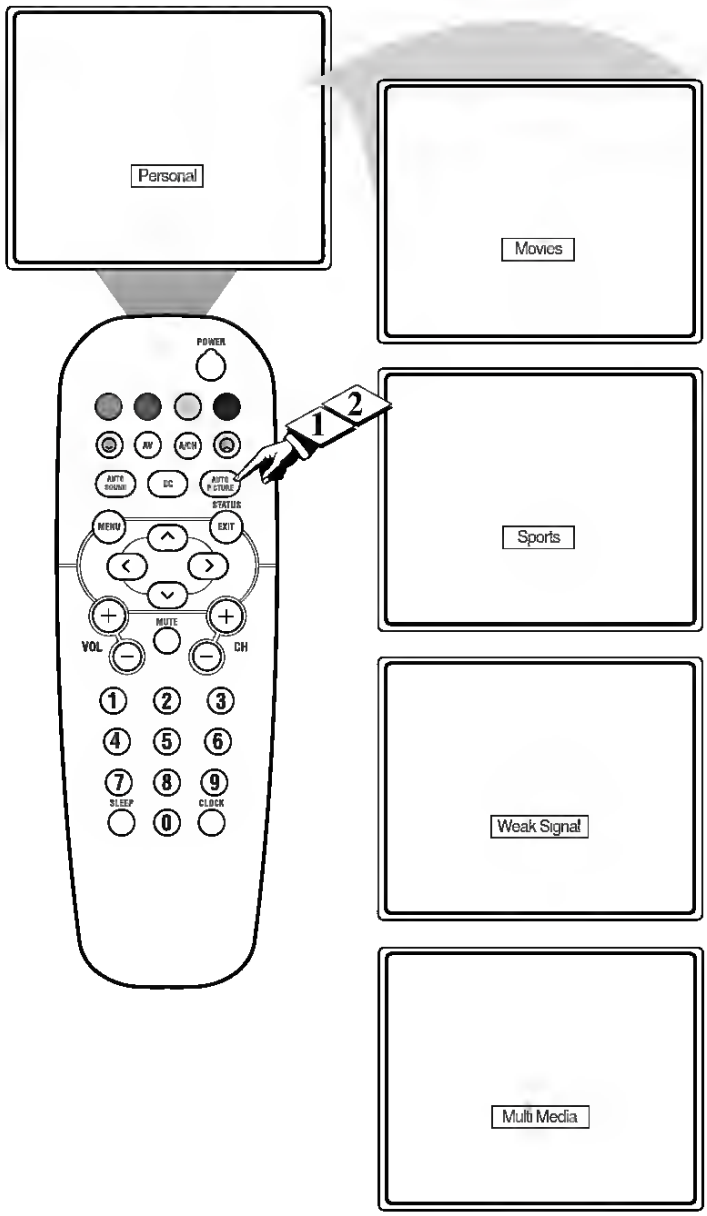

Downloaded from www.Manualslib.com manuals search engine

Symptom	Cause and/or corrective action
"HOLD" flashes in the display when you press a button, and the CD does not play.	→ The buttons are locked. Slide the HOLD switch back. (page 23)
Playback starts from the point you stopped. (resume function)	→ The resume function is working. To start play from the first track, press and hold ►II/ENT during stop until the first track starts playing, or open the lid of the CD player. Or remove all power sources, then insert the batteries or connect the AC power adaptor again. (pages 13, 14, 25)
Rustling noise is heard from the CD.	→ Close the lid of the battery compartment firmly. (page 25)
During playback of an ATRAC CD or MP3 CD, the CD does not rotate but you can hear the sound normally.	→ The CD player is designed to stop the rotation of an ATRAC CD or MP3 CD during playback to reduce the power consumption. The player is not malfunctioning.
"NO FILE" appears on the display after you press ►II/ ENT or when the lid of the CD player is closed.	→ There are no ATRAC3plus/ATRAC3/MP3 files in the CD. → A CD-R/RW from which the data has been erased is being used. → The CD is dirty.
When closing the lid of the CD player, the CD starts to rotate.	→ The CD player is reading the information on the CD. The player is not malfunctioning.
The LCD display becomes hard to see or slows down.	→ You are using your CD player at high temperatures (above 40°C/ 104°F) or at low temperatures (below 0°C/32°F). At room temperature, the display will return to its normal operating condition.
Play is stopped abruptly.	→ OFF TIMER has been set. Change the setting to "OFF."

Setting the Image Size and Quality

Size and quality settings determine the pixel size (dimension), image file size, and compression ratio for your image. These settings affect the number of images. These settings affect the number of images that can be stored in an SD Memory Card.

Larger and higher quality images offer the best photographic results but take up more memory space. Larger/quality settings are recommended for printed output and situations requiring the finest detail. Smaller/quality images take up less memory space and may be quite suitable for sharing images via e-mail, in a report, or on a web page.

To change image size or image quality,

1. Set the mode dial to one of [A], [**P**], [**Tv**], [**Av**], [**M**], [ ], [ ] , [ ] and power on the camera.
2. Press the **MENU** button.
   ■ The menu screen appears.
3. Select Size or Quality by using the ▲ or ▼ button.
4. Press the **SET** button. Select the desired image size or image quality setting by using the ▲ or ▼ button.
5. Press the **SET** button to confirm. To exit the menu screen press the **MENU** button.

Downloaded from www.Manualslib.com manuals search engine

GLOSSARY OF TERMS

Auto Programming • The procedure of adding or deleting channel numbers into the Television's memory circuits. In this way the Television "remembers" only the locally available or desired channel numbers and skips over any unwanted channel numbers.

Coaxial Cable • A single solid antenna wire normally matched with a metal plug (F-type) end connector that screws (or pushes) directly on to a 75 Ohm input found on the Television or VCR.

Closed Caption • Broadcast standard which allows you to read the voice content of television programs on the TV screen. Designed to help the hearing impaired this feature uses on-screen "text boxes" to show dialogue and conversations while the TV program is in progress.

Front Audio/Video Inputs • Located on the front or side of the TV these connectors (phono type plug) are used for the input of audio and video signals. Designed for easy use with VCRs or cameras.

On Screen Displays (OSD) • Refers to the wording or messages generated by the television (or VCR) to help the user with specific feature controls (color adjustment, programming, etc.).

Menu • An on-screen listing of feature controls shown on the Television screen that are made available for user adjustments.

Quadra Surf • The feature that allows the programming of four separate Surf lists holding up to 10 channels each.

Remote Sensor Window • A window or opening found on the Television control panel through which infrared remote control command signals are received.

Status/Exit • Allows the user to quickly confirm what channel number is currently being viewed. Status can also be used to clear the Television of on screen displays or information (rather than waiting for the displays to "time out" or automatically disappear from the screen).

Surf • The action of scanning specific channel in a limited channel list.

Twin Lead Wire • The more commonly used name for the two strand 300 Ohm antenna wire used with many indoor and outdoor antenna systems. In many cases this type of antenna wire requires an additional adapter (or balun) in order to connect to the 75 Ohm Input terminals designed into the more recent Televisions and VCRs.

Tuner Mode • Feature control settings made by the TV. Designed for first time set up and use. Settings for signal connections (antenna or cable TV), plus channel program memory are held in the TV's memory (even if the set is unplugged and moved to a new location.)

INDEX

Alternate Channel 30
Antenna TV Connection 6
Auto Lock
  Access Code 21
  Block All Control 24
  Block Channels Control 22
  Blocking Options 27
  Clear All Control 23
  Explanation of Auto Lock 20
  Movie Rating Control 25
  TV Rating Control 26
Auto Program Control 13
AVL Control 19
Brightness Control 15
Cable TV Connection (Basic Connection) 5
Care and Cleaning 32
Channel Edit Control 14
Closed Caption Control 28
Color Control 15
Color Temperature Control 15
Contrast + Control 17
Dynamic Noise Reduction (DNR) Control 16
Factory Service Information 34-35
Front A/V Inputs 8
Glossary of Terms 33
Index 33
Language Control 11
Picture Control 15
Remote Control Buttons 10
Remote Control Operation (Basic) 9
Safety Instructions 3
Sharpness Control 15
Sleeptimer Control 29
Surf/Quadra Surf Controls 30-31
Timer Controls 19
Tint Control 15
Troubleshooting Tips 32
Tuner Mode Control 12
TV Operation (Basic) 9
VCR Connection (Basic) 7
Limited Warranty 36
Welcome/Registration Information 2

Downloaded from www.Manualslib.com manuals search engine

maintenance & service guide

Presario 1600XL Series

Model 1600T, 1600-XL140, 1600-XL141, 1600-XL142, 1600-XL143, 1600-XL144, 1600-XL146, 1600-XL147, 1600-XL150 XL156, XL157, XL255, XL256, XL257, and XL258

Diskette Drive

Diskette Drive	
Capacity per Diskette (High/Low)	1.44 MB/720KB
Diskette Size	3.5 inch
Number of LED Indicators (Read/Write)	0
Number of Drives Supported	1
Drive Rotation (rpm)	300
Transfer Rate (Kbps)	500
Bytes per Sector	512
Sectors per Track (High/Low)	18/9
Tracks per Side (High/Low)	80
Access Times	
Track-to-Track (ms)	3
Average (ms)	94
Setting Time (ms)	15
Latency Average (ms)	100
Cylinders (High/Low)	80
Number of Read/Write Heads	2

Downloaded from www.Manualslib.com manuals search engine

Click on a vertical bar and click Play. The audio will be played until you click Stop or the end of the day is reached. As the audio is played, the display changes to indicate which intercom the audio came from or was sent to.

If you want to skip backwards or forward between audio clips, use the << or >> keys.

Managed Intercoms

TalkMaster™ allows you to create a list of managed Intercoms so you can always determine whether they are online or offline. When you start TalkMaster, all managed Intercoms are listed with a red ICON. As each Intercom connects, the ICON turns green.

To add an Intercom to TalkMaster's managed list, check the List when offline box in the Intercom Configuration Tool. This box is automatically checked when the Assign this PC address as client's server box is checked. The Intercom's unique ICOM ID is used to track the Intercom.

You can also configure an intercom by right clicking on it in the Intercom View / Custom View and selecting the List when Offline option.

If you need to remove an Intercom from the Managed Intercom list, you can right click on it in the Intercom View / Custom View and select the Do NOT list when Offline option.

You must be in Admin mode to activate the List when Offline / Do NOT list when Offline right click option.

If an Intercom is offline, its ICON will turn red.

If one or more Intercoms within a Paging Group are offline, the Paging Group's ICON will turn yellow. Right clicking on the Paging Group will show all online and offline Intercoms for that group.

Downloaded from www.Manualslib.com manuals search engine

Step 7: Start Dryer

To start dryer, push START pad.

To stop dryer at any time, open the door. To restart the dryer, close door and push START pad.

Cycle is completed when time remaining reaches 00 minutes.

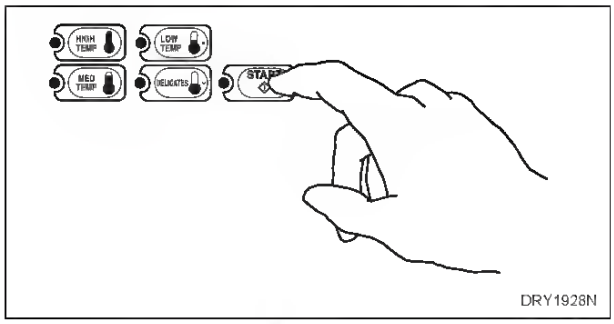

Figure 44

Indicator Lights

START

START is lit whenever the dryer is not in a cycle, the full vend price has been satisfied and the dryer door is closed. When the START pad is pressed, the cycle will begin or resume.

DRYING

DRYING is lit to indicate that one of the heated cycles (HIGH TEMP, MED TEMP, LOW TEMP or DELICATES) is currently in operation. *DRYING* will turn off at the end of a heated cycle or when the COOL DOWN cycle begins.

COOL DOWN

COOL DOWN is lit whenever the COOL DOWN portion of a heated cycle is active. It is also lit when no heat is programmed for a cycle in operation.

© Copyright, Alliance Laundry Systems LLC – DO NOT COPY or TRANSMIT

Note: The maximum shift of vertical (horizontal) image adjustment can be limited by horizontal (vertical) image position. Please refer below diagram.

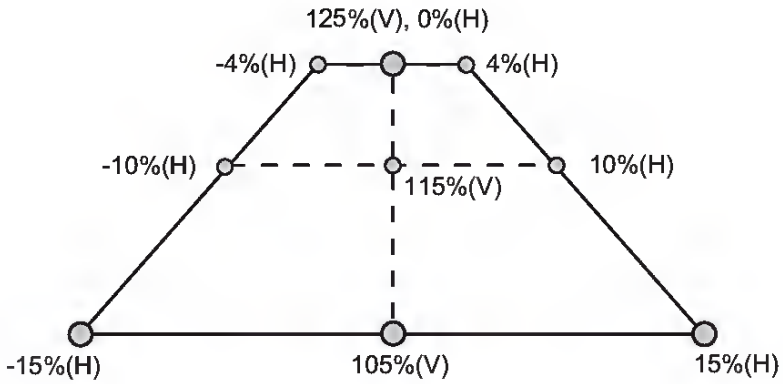

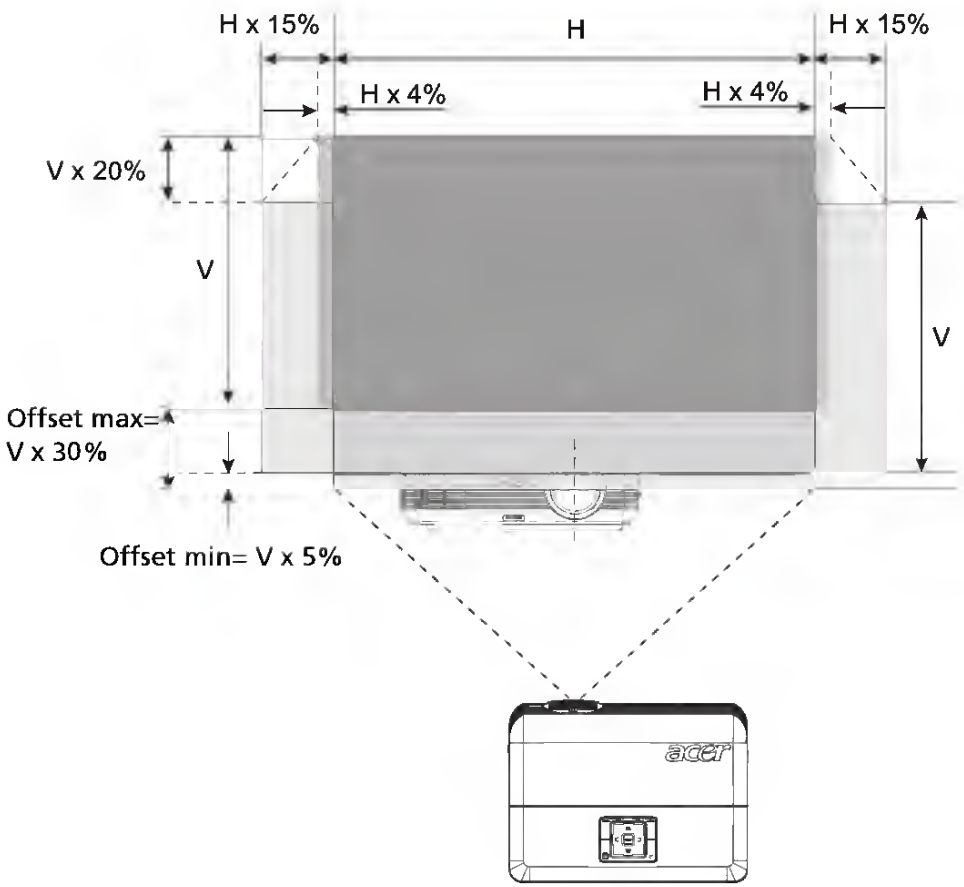

Downloaded from www.Manualslib.com manuals search engine

FRU (Field Replaceable Unit) List

Chapter 6

This chapter gives you the FRU (Field Replaceable Unit) listing in global configurations of V203W Refer to this chapter whenever ordering for parts to repair or for RMA (Return Merchandise Authorization)

NOTE: Please note WHEN ORDERING FRU PARTS, that you should check the most up-to-date information available on your regional web or channel (http://aicsl.acer.com.tw/spl/). For whatever reasons a part number change is made, it will not be noted in the printed Service Guide. For ACER AUTHORIZED SERVICE PROVIDERS, your Acer office may have a DIFFERENT part number code from those given in the FRU list of this printed Service Guide. You MUST use the local FRU list provided by your regional Acer office to order FRU parts for repair and service of customer machines

NOTE: To scrap or to return the defective parts, you should follow the local government ordinance or regulations on how to dispose it properly, or follow the rules set by your regional Acer office on how to return it.

Exploded Diagram (Model: V203W)

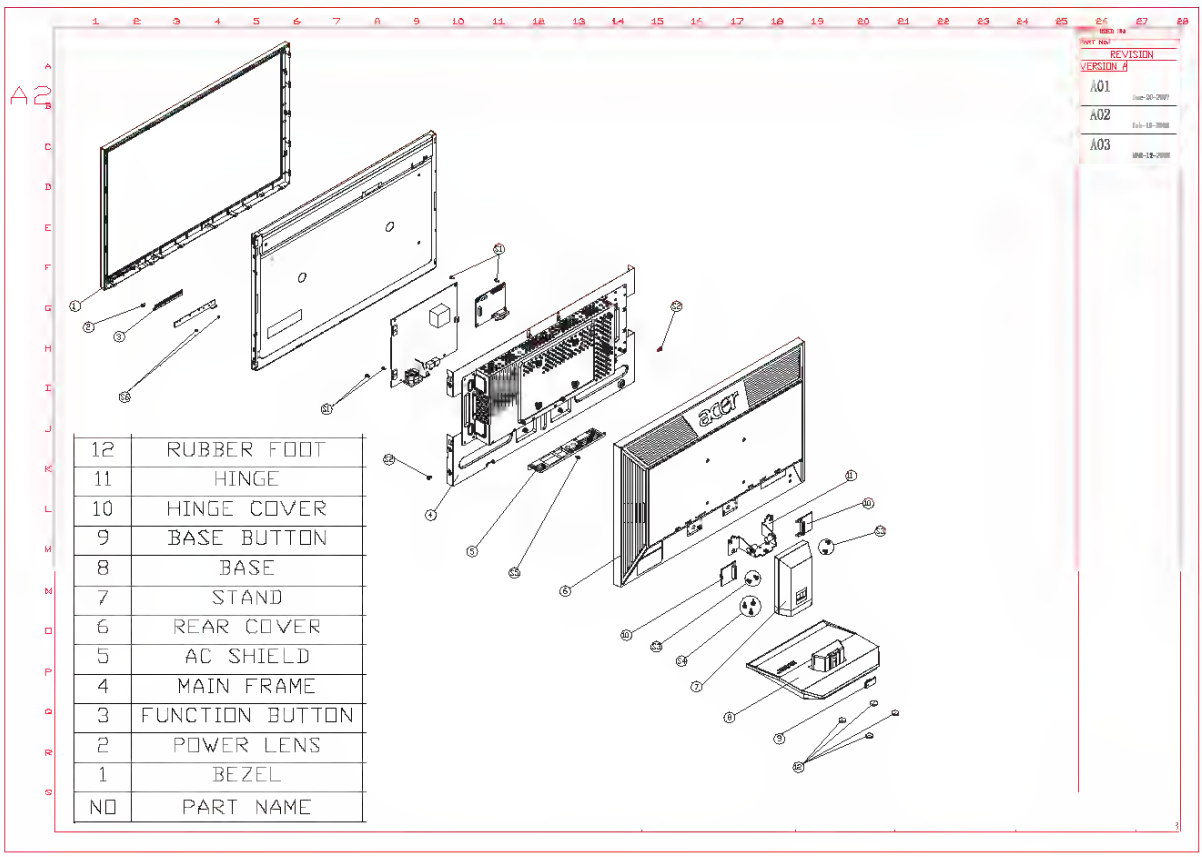

NO	PART NAME
12	RUBBER FOOT
11	HINGE
10	HINGE COVER
9	BASE BUTTON
8	BASE
7	STAND
6	REAR COVER
5	AC SHIELD
4	MAIN FRAME
3	FUNCTION BUTTON
2	POWER LENS
1	BEZEL

Downloaded from www.Manualslib.com manuals search engine

8.3.1 Tools – FTP Server Test

The **Tools – FTP Server Test** page allows you to test the **FTP Server Settings** of the Camera.

Click on **Test** to perform the test. A jpeg file will be uploaded to the FTP server you specified.

8.3.2 Tools – E-mail Test

The **Tools – E-mail Test** page allows you to test the **E-mail Settings** of the Camera.

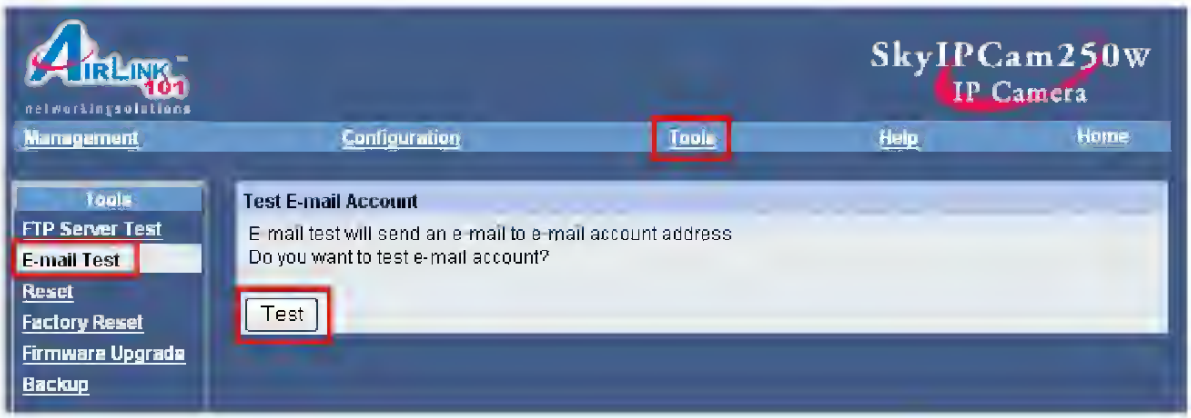

Click on **Test** to perform the test. An e-mail will be sent to the e-mail account you specified.

Downloaded from www.Manualslib.com manuals search engine

English

Securing your computer

Your computer is a valuable investment that you need to take care of. Learn how to protect and take care of your computer.

Security features include hardware and software locks — a security lock and passwords.

Using a computer security lock

A security keylock notch located on the left panel of the computer lets you connect a Kensington-compatible computer security lock.

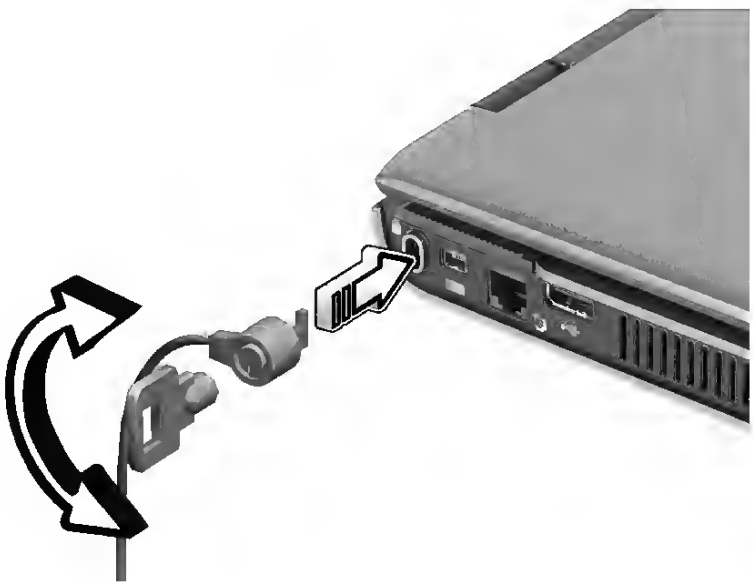

Wrap a computer security lock cable around an immovable object such as a table or locked drawer handle. Insert the lock into the notch and turn the key to secure the lock. Some keyless models are also available.

Downloaded from www.Manualslib.com manuals search engine

SENSOR MUSICAL

Si hay un espacio sin grabar de 4 segundos o mas entre cada canción, la búsqueda del principio de la cancion que esté siendo reproducida o de la siguiente cancion podrá realizarse facilmente. Pulse el botón ◄◄ o ►► durante la reproducción observando el indicador de la cara de reproducción (◄ o ►) del visualizador. Por ejemplo, cuando pulse el botón ►► mientras se visualiza ►, empezará a reproducirse la siguiente canción.

La función del sensor musical tal vez no pueda detectar las canciones bajo las condiciones siguientes:
- Espacios sin grabar de menos de 4 segundos entre las canciones.
- Espacios sin grabar que tengan ruido.
- Pasajes largos con un sonido muy bajo.
- Niveles de grabación bajos en general.

REPRODUCCION CONTINUA

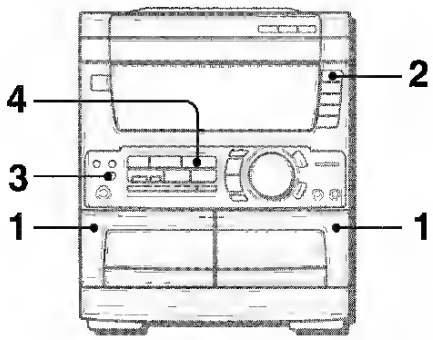

Después de terminar la reproducción en una platina, la cinta de la otra platina empezará a reproducirse sin interrupción.

1 **Inserte cintas en las platinas 1 y 2.**

2 **Pulse el botón TAPE/DECK 1/2 para seleccionar la platina que vaya a realizar la reproducción en primer lugar.**

3 **Pulse el botón REV MODE para seleccionar ⇄.**

4 **Pulse el botón ◄► para iniciar la reproducción.**
La reproducción continuará hasta que se pulse el botón ■.

Acerca de las cintas de casete
- **Para evitar el borrado accidental**, rompa con un destornillador u otra herramienta puntiaguda las lenguetas de plástico del casete después de grabar.

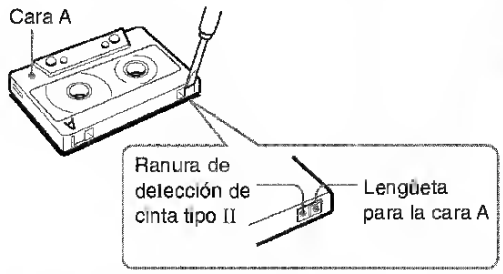

Para volver a grabar en una cinta, tape las aberturas con cinta adhesiva, etc. (En cintas tipo II, tenga cuidado para no tapar la ranura de detección de cinta tipo II.)
- **Las cintas de 120 minutos o más** son extremadamente finas y se deforman o estropean fácilmente. No son recomendadas.
- **Tense la cinta** con un lapicero o herramienta similar antes de utilizarla. La cinta floja podrá romperse o atascarse en el mecanismo.



Sistema DOLBY NR
El sistema de reducción de ruido Dolby reduce el ruido de silbido de la cinta. Para obtener unas prestaciones óptimas cuando reproduzca una cinta grabada con el sistema DOLBY NR, active el sistema DOLBY NR.

Downloaded from www.Manualslib.com manuals search engine

English

Standard package contents	• AC power cord x 1 • HDMI cable x 1 • Remote control x 1 • AA Battery x 2 (for the remote control) • User's guide (CD-ROM) x 1 • Quick start guide x 1

* Design and specifications are subject to change without notice.

Downloaded from www.Manualslib.com manuals search engine

Entretien
Nettoyez l'appareil en suivant scrupuleusement les recommandations faites dans ces instructions d'utilisation.

Dommages nécessitant des réparations
Faites appel uniquement à un technicien qualifié pour faire réparer l'appareil si:
- le cordon ou la fiche d'alimentation sont endommagés
- des corps étrangers ou du liquide ont pénétré à l'intérieur de l'appareil
- l'appareil a été exposé à de la pluie ou à de l'humidité
- l'appareil ne semble pas fonctionner normalement
- la performance de l'appareil a changé de manière sensible
- l'appareil est tombé ou son coffret a été endommagé

N'ESSAYEZ PAS DE RÉPARER L'APPAREIL VOUS-MÊME.

Aiwa vous souhaite la Bienvenue

Nous vous félicitons d'avoir acheté une chaîne stéréo AIWA. Afin d'optimiser le bon fonctionnement de cette chaîne, prenez le temps de bien lire ces instructions d'utilisation et de vous familiariser avec les méthodes d'utilisation.

Vérifiez votre chaîne et ses accessoires

Récepteur radio/platine casse te/lecteur de disques compacts stéréo XR-M35



SX-M35 Haut-parleurs (gauche et droit)



Télécommande

Antenne FM

Antenne AM



Instructions d'utilisation etc.

Registre du propriétaire
Inscrivez dans les cases ci-dessous le numéro du modèle et le numéro de série de votre chaîne (qui sont indiqués sur le dos de celle-ci). Vous les aurez ainsi sous la main si vous avez besoin de contacter votre distributeur AIWA en cas de difficulté.

Modèle Nº	Nº de Série (Nº de lot)
XR-M35U	
SX-M35	

TABLE DES MATIÈRES

PRÉPARATIONS
PRÉCAUTIONS 1
CONNEXIONS 3
AVANT L'UTILISATION 5
RÉGLAGE DE L'HORLOGE 5

SON
RÉGLAGE DU SON 6

RÉCEPTION RADIO
ACCORD MANUEL 7
PRÉRÉGLAGE DES STATIONS 8

LECTURE DE DISQUES COMPACTS
UTILISATION 9

LECTURE DE CASSETTES
UTILISATION 11

ENREGISTREMENT
ENREGISTREMENT DE BASE 13
ENREGISTREMENT AVEC MONTAGE AI 14
ENREGISTREMENT AVEC MONTAGE PROGRAMMÉ .. 15

MINUTERIE
RÉGLAGE DE LA MINUTERIE 16
RÉGLAGE DE LA MINUTERIE DE SOMMEIL 17

AUTRES CONNEXIONS
CONNEXION D'UN APPAREIL OPTIONNEL 17
ÉCOUTE DE SOURCES EXTERNES 18

GÉNÉRALITÉS
SOINS ET ENTRETIEN 18
SPÉCIFICATIONS 19
GUIDE DE DÉPISTAGE DES DÉFAUTS 20
INDEX 20

Downloaded from www.Manualslib.com manuals search engine

This page intentionally left blank

All manuals and user guides at all-guides.com

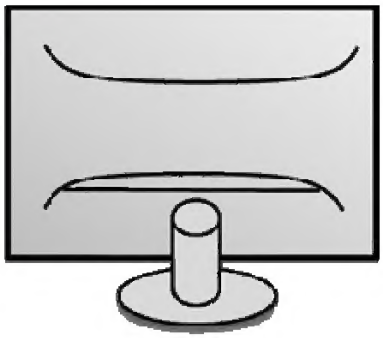

Monitor

FTC100103(MSTAR) usb drive.rar

USB port driver

ISP_Tool.exe

ISP tool



ACER-B243PHL-TSUM...

New F/W

6.2 Connection:

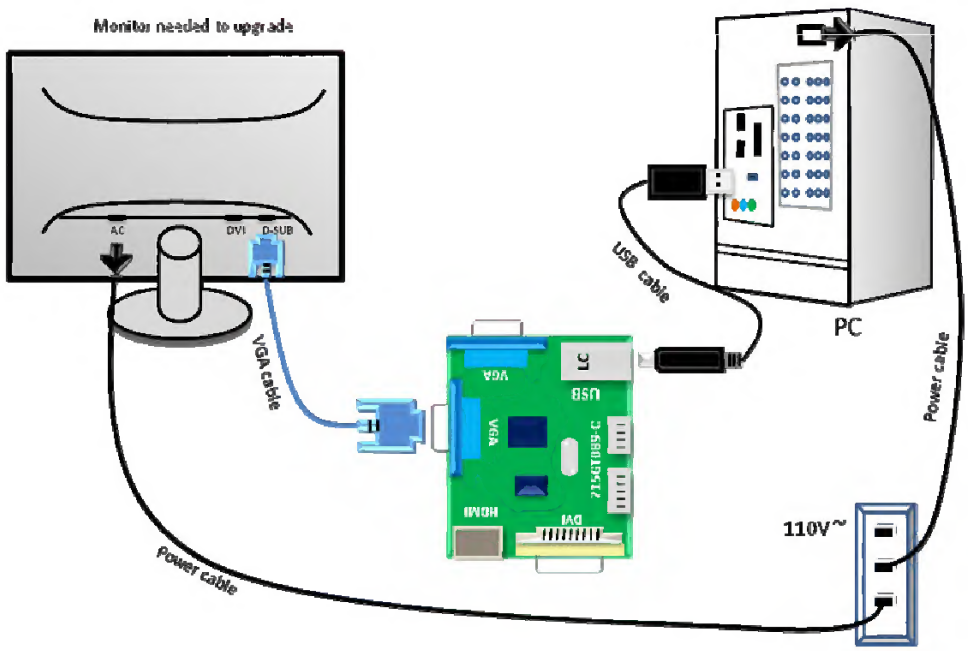

All manuals and user guides at all-guides.com

verfpi-0.book Page 36 Thursday, October 19, 2000 1:51 PM

4. Color mode

   To adjust the color settings of the OSD, position the cursor on Mode and press the S key to change the setting to Normal, Graphics or Video.

   Note: For more improved/brighter graphics display while playing video games, use the "Graphics" setting.For enhanced video while viewing movies, set the mode to "Video" setting.

5. Mode info

   The Mode Info indicates the screen resolution and vertical/horizontal frequency of the OSD. The **????X???** in the Mode Info Menu indicates the screen resolution set in the Windows 2000 or Windows Me display properties screen.



   You can change the screen resolution settings by clicking the Windows Start menu, pointing to Settings, clicking Control Panel, double-clicking Display and then clicking on the Settings tab.

6. Reset

   The reset setting from the main menu allows you to reload the previously saved values in the Position X or Y, Timeout and Color Mode settings.



Downloaded from www.Manualslib.com manuals search engine

Step 4 If you have not previously set this printer as the default printer, your computer will prompt you for a PostScript Printer Description file. Choose **Select PPD**.

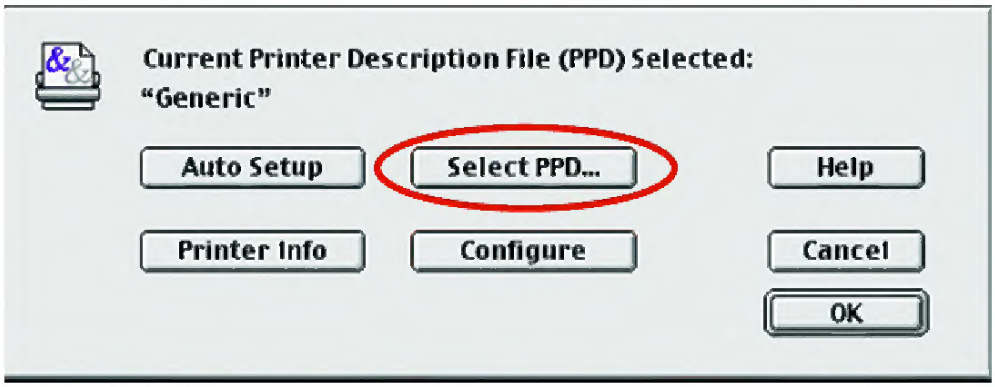

Step 5 Select the appropriate printer description file for your printer. Click **Open**. (If your printer is not listed, click **Generic** to use a generic printer description).

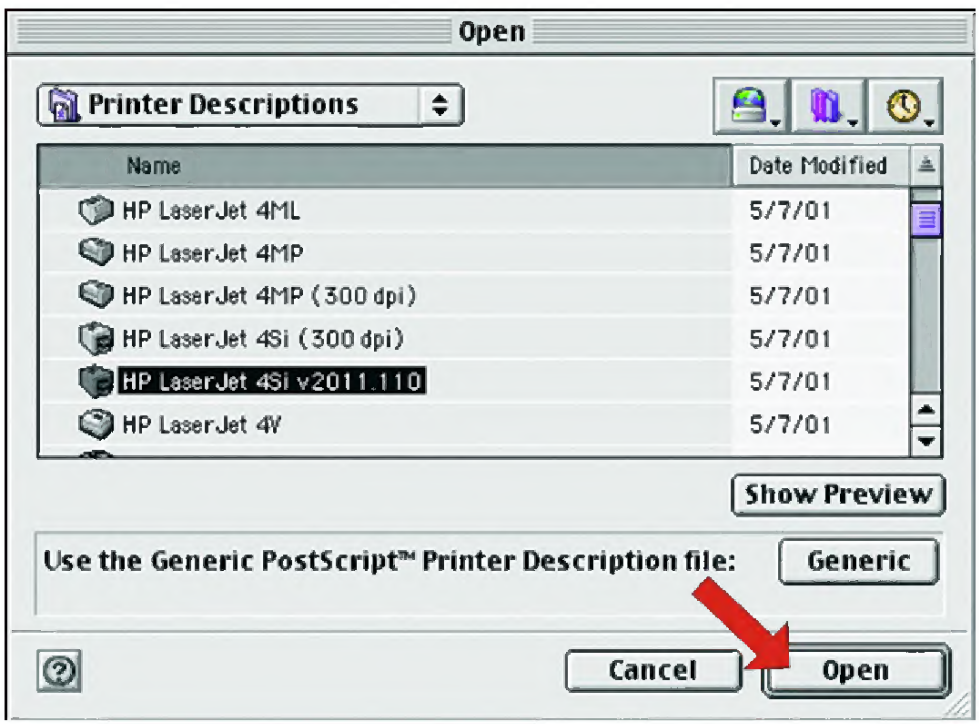

The selected printer will become your computer's default printer. You may need to choose **Page Setup** in any application you have opened.

Downloaded from www.Manualslib.com manuals search engine